


Project name		Product No.		Lamp quantity	
Lamp fitting type	Ceiling spotlight	application place	restaurant,hotel,shop etc		
product model	LD1003R-01	Installation mode	Recessed Installation	Cut size (mm)	Φ75
Lamp Picture	Shape Size		Accessories combination		

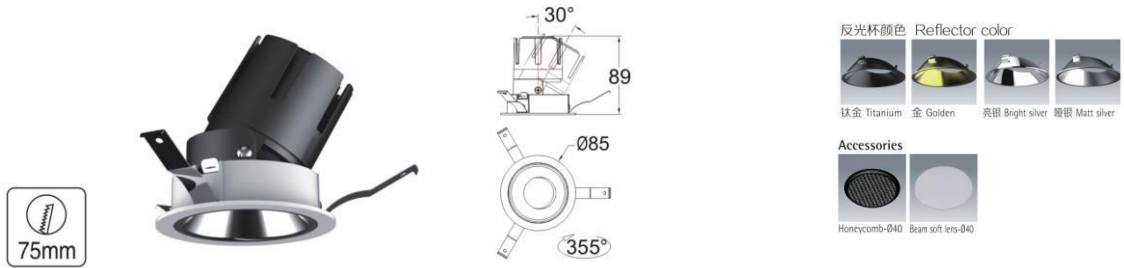

Description	Adopt imported COB LED,high CRI,high efficiency,high liumination.
	Self-designed reflector with special optic,precise light distribution and high lumen output,no-glare,soft and tender light.
	Environmental,no UV,nice heat dissipation.
	Easy to install and to adjust.
	Life span up to 50000 hours.
	Various power options for different requirments.
	Applied to shopping mall,hotel,exhibition hall,museum and etc.

Light distribution curve	<table border="1"> <tr><th>m</th><th>Lux</th><th>cm</th></tr> <tr><td>1.0</td><td>3250</td><td>30</td></tr> <tr><td>2.0</td><td>812</td><td>60</td></tr> <tr><td>3.0</td><td>361</td><td>90</td></tr> <tr><td>4.0</td><td>203</td><td>118</td></tr> </table> <p>Beam Angle=15°</p>	m	Lux	cm	1.0	3250	30	2.0	812	60	3.0	361	90	4.0	203	118	<table border="1"> <tr><th>m</th><th>Lux</th><th>cm</th></tr> <tr><td>1.0</td><td>2135</td><td>42</td></tr> <tr><td>2.0</td><td>534</td><td>83.5</td></tr> <tr><td>3.0</td><td>237</td><td>125.5</td></tr> <tr><td>4.0</td><td>133</td><td>167.5</td></tr> </table> <p>Beam Angle=24°</p>	m	Lux	cm	1.0	2135	42	2.0	534	83.5	3.0	237	125.5	4.0	133	167.5	<table border="1"> <tr><th>m</th><th>Lux</th><th>cm</th></tr> <tr><td>1.0</td><td>1585</td><td>60</td></tr> <tr><td>2.0</td><td>396</td><td>115</td></tr> <tr><td>3.0</td><td>176</td><td>170</td></tr> <tr><td>4.0</td><td>99</td><td>235</td></tr> </table> <p>Beam Angle=38°</p>	m	Lux	cm	1.0	1585	60	2.0	396	115	3.0	176	170	4.0	99	235	<table border="1"> <tr><th>m</th><th>Lux</th><th>cm</th></tr> <tr><td>1.0</td><td>743</td><td>92</td></tr> <tr><td>2.0</td><td>186</td><td>184</td></tr> <tr><td>3.0</td><td>82</td><td>276</td></tr> <tr><td>4.0</td><td>47</td><td>375</td></tr> </table> <p>Beam Angle=55°</p>	m	Lux	cm	1.0	743	92	2.0	186	184	3.0	82	276	4.0	47	375
	m	Lux	cm																																																													
	1.0	3250	30																																																													
	2.0	812	60																																																													
3.0	361	90																																																														
4.0	203	118																																																														
m	Lux	cm																																																														
1.0	2135	42																																																														
2.0	534	83.5																																																														
3.0	237	125.5																																																														
4.0	133	167.5																																																														
m	Lux	cm																																																														
1.0	1585	60																																																														
2.0	396	115																																																														
3.0	176	170																																																														
4.0	99	235																																																														
m	Lux	cm																																																														
1.0	743	92																																																														
2.0	186	184																																																														
3.0	82	276																																																														
4.0	47	375																																																														

Appearance color	black/white	Lamp Performance	
		power supply	Eaglerise Non-Dimmable Flicker Free
IP/ insulation class	IP20	input voltage (V)	220-240V
		CCT (K)	2700K/3000K/4000K/5000K
Product certification	ISO9001 / CE / CB /	luminous flux/ (lm)	720lm±10% (3000K 38°RA90)
		beam angle	15°/24°/38°/55°

Power (W)	9W (Bridgelux V8)	(Ra)	90	lifespan (H)	50000Hours
Package size	innerbox(L*W*H):	carton size(L*W*H):335*335*530mm(36PCS)			bubble bag