


Project name		Product No.		Lamp quantity	
Lamp fitting type	Ceiling spotlight	application place	restaurant,hotel,shop etc		
product model	LD1003R-02	Installation mode	Recessed Installation	Cut size (mm)	Φ75
Lamp Picture	Shape Size		Accessories combination		

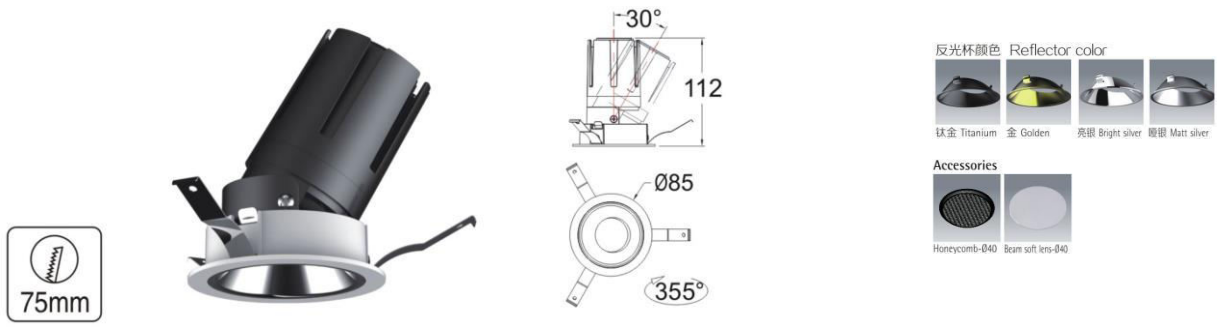

Description	<p>Adopt imported COB LED,high CRI,high efficiency,high liumination.</p> <p>Self-designed reflector with special opitic,precise light distribution and high lumen output,no-glare,soft and tender light.</p> <p>Environmental,no UV,nice heat dissipation.</p> <p>Easy to install and to adjust.</p> <p>Life span up to 50000 hours.</p> <p>Various power options for different requirments.</p> <p>Applied to shopping mall,hotel,exhibition hall,museum and etc.</p>
-------------	--

Light distribution curve	<table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr><td>1.0</td><td>6150</td><td>30</td></tr> <tr><td>2.0</td><td>1538</td><td>60</td></tr> <tr><td>3.0</td><td>683</td><td>90</td></tr> <tr><td>4.0</td><td>384</td><td>118</td></tr> </tbody> </table> <p>Beam Angle=15°</p> <table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr><td>1.0</td><td>3932</td><td>42</td></tr> <tr><td>2.0</td><td>983</td><td>83.5</td></tr> <tr><td>3.0</td><td>437</td><td>125.5</td></tr> <tr><td>4.0</td><td>256</td><td>167.5</td></tr> </tbody> </table> <p>Beam Angle=24°</p> <table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr><td>1.0</td><td>2859</td><td>60</td></tr> <tr><td>2.0</td><td>715</td><td>115</td></tr> <tr><td>3.0</td><td>318</td><td>170</td></tr> <tr><td>4.0</td><td>179</td><td>235</td></tr> </tbody> </table> <p>Beam Angle=38°</p> <table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr><td>1.0</td><td>1315</td><td>92</td></tr> <tr><td>2.0</td><td>329</td><td>184</td></tr> <tr><td>3.0</td><td>146</td><td>276</td></tr> <tr><td>4.0</td><td>82</td><td>375</td></tr> </tbody> </table> <p>Beam Angle=55°</p>	m	Lux	cm	1.0	6150	30	2.0	1538	60	3.0	683	90	4.0	384	118	m	Lux	cm	1.0	3932	42	2.0	983	83.5	3.0	437	125.5	4.0	256	167.5	m	Lux	cm	1.0	2859	60	2.0	715	115	3.0	318	170	4.0	179	235	m	Lux	cm	1.0	1315	92	2.0	329	184	3.0	146	276	4.0	82	375
m	Lux	cm																																																											
1.0	6150	30																																																											
2.0	1538	60																																																											
3.0	683	90																																																											
4.0	384	118																																																											
m	Lux	cm																																																											
1.0	3932	42																																																											
2.0	983	83.5																																																											
3.0	437	125.5																																																											
4.0	256	167.5																																																											
m	Lux	cm																																																											
1.0	2859	60																																																											
2.0	715	115																																																											
3.0	318	170																																																											
4.0	179	235																																																											
m	Lux	cm																																																											
1.0	1315	92																																																											
2.0	329	184																																																											
3.0	146	276																																																											
4.0	82	375																																																											

Appearance color	black/white	Lamp Performance	
		power supply	Eaglerise Non-Dimmable Flicker free
IP/ insulation class	IP20	input voltage (V)	220-240V
		CCT (K)	2700K/3000K/4000K/5000K
Product	ISO9001 / CE / CB /	luminous flux/ (lm)	1200lm±10% (3000K 38°RA90)
		beam angle	15°/24°/38°/55°

Power (W)	15W (Bridgelux V10B)	(Ra)	90	lifespan (H)	50000Hours
Package size	innerbox	carton size(L*W*H):			bubble bag