


| | | | | | |
|---------------------|-------------------|-------------------|--------------------------------|-----------------|-----|
| | | Product No. | | Lamp quantity | |
| Lamp fitting type | | application place | | | |
| product model | LD1012R-01 | Installation mode | Recessed installation | Cut size (mm) | Φ75 |
| Lamp Picture | Shape Size | | Accessories combination | | |

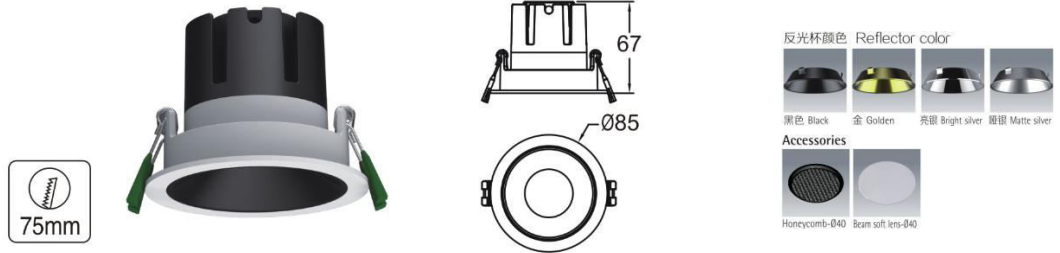

| | |
|-------------|---|
| Description | Adopt imported COB LED,high CRI,high efficiency,high liumination. |
| | Self-designed reflector with special optic,precise light distribution and high lumen output,no-glare,soft and tender light. |
| | Environmental,no UV,nice heat dissipation. |
| | Easy to install and to adjust. |
| | Life span up to 50000 hours. |
| | Various power options for different requirments. |
| | Applied to shopping mall,hotel,exhibition hall,museum and etc. |

| Light distribution curve | <table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1.0</td> <td>3250</td> <td>30</td> </tr> <tr> <td>2.0</td> <td>812</td> <td>60</td> </tr> <tr> <td>3.0</td> <td>361</td> <td>90</td> </tr> <tr> <td>4.0</td> <td>203</td> <td>118</td> </tr> </tbody> </table> <p>Beam Angle=15°</p> | m | Lux | cm | 1.0 | 3250 | 30 | 2.0 | 812 | 60 | 3.0 | 361 | 90 | 4.0 | 203 | 118 | <table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1.0</td> <td>2135</td> <td>42</td> </tr> <tr> <td>2.0</td> <td>534</td> <td>83.5</td> </tr> <tr> <td>3.0</td> <td>237</td> <td>125.5</td> </tr> <tr> <td>4.0</td> <td>133</td> <td>167.5</td> </tr> </tbody> </table> <p>Beam Angle=24°</p> | m | Lux | cm | 1.0 | 2135 | 42 | 2.0 | 534 | 83.5 | 3.0 | 237 | 125.5 | 4.0 | 133 | 167.5 | <table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1.0</td> <td>1585</td> <td>60</td> </tr> <tr> <td>2.0</td> <td>396</td> <td>115</td> </tr> <tr> <td>3.0</td> <td>176</td> <td>170</td> </tr> <tr> <td>4.0</td> <td>99</td> <td>235</td> </tr> </tbody> </table> <p>Beam Angle=38°</p> | m | Lux | cm | 1.0 | 1585 | 60 | 2.0 | 396 | 115 | 3.0 | 176 | 170 | 4.0 | 99 | 235 | <table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1.0</td> <td>743</td> <td>92</td> </tr> <tr> <td>2.0</td> <td>186</td> <td>184</td> </tr> <tr> <td>3.0</td> <td>82</td> <td>276</td> </tr> <tr> <td>4.0</td> <td>47</td> <td>375</td> </tr> </tbody> </table> <p>Beam Angle=55°</p> | m | Lux | cm | 1.0 | 743 | 92 | 2.0 | 186 | 184 | 3.0 | 82 | 276 | 4.0 | 47 | 375 |
|--------------------------|--|-------|-----|----|-----|------|----|-----|-----|----|-----|-----|----|-----|-----|-----|---|---|-----|----|-----|------|----|-----|-----|------|-----|-----|-------|-----|-----|-------|---|---|-----|----|-----|------|----|-----|-----|-----|-----|-----|-----|-----|----|-----|---|---|-----|----|-----|-----|----|-----|-----|-----|-----|----|-----|-----|----|-----|
| | m | Lux | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0 | 3250 | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.0 | 812 | 60 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.0 | 361 | 90 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.0 | 203 | 118 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| m | Lux | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0 | 2135 | 42 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.0 | 534 | 83.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.0 | 237 | 125.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.0 | 133 | 167.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| m | Lux | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0 | 1585 | 60 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.0 | 396 | 115 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.0 | 176 | 170 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.0 | 99 | 235 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| m | Lux | cm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0 | 743 | 92 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.0 | 186 | 184 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.0 | 82 | 276 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.0 | 47 | 375 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | | | |
|----------------------|---------------------|-------------------------|-------------------------------------|
| Appearance color | black/white | Lamp Performance | |
| | | power supply | Eaglerise Non-Dimmable Flicker Free |
| IP/ insulation class | IP20 | input voltage (V) | 220-240V |
| | | CCT (K) | 2700K/3000K/4000K/5000K |
| Product | ISO9001 / CE / CB / | luminous flux/ (lm) | 720lm±10% (3000K 24° RA90) |
| | | beam angle | 15°/24°/38°/55° |

| | | | | | |
|--------------|-------------------|---------------------|----|----------------|----------------------|
| Power (W) | 9W (Bridgelux V8) | (Ra) | 90 | lifespan (H) | 50000H |
| Package size | innerbox | carton size(L*W*H): | | | bubble bag 200×220mm |