


Project name		Product No.		Lamp quantity	
Lamp fitting type	Ceiling spotlight	application place	restaurant,hotel,shop etc		
product model	LD1012R-02	Installation mode	Recessed installation	Cut size (mm)	Φ75
Lamp Picture	Shape Size		Accessories combination		

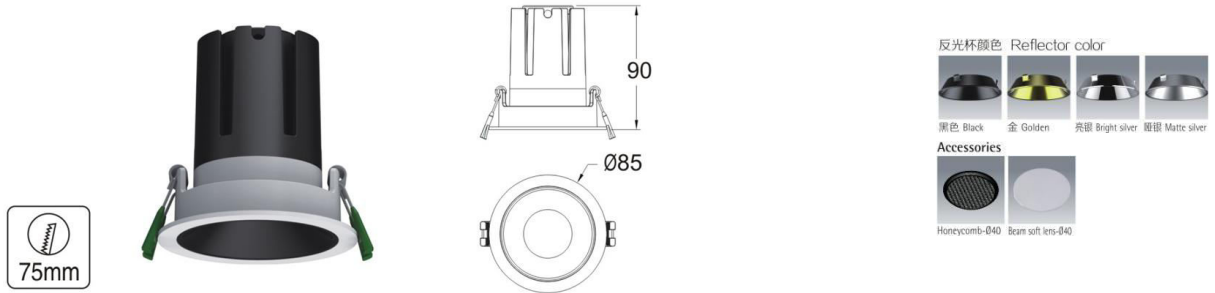

Description	Adopt imported COB LED,high CRI,high efficiency,high liumination.
	Self-designed reflector with special opitic,precise light distribution and high lumen output,no-glare,soft and tender light.
	Environmental,no UV,nice heat dissipation.
	Easy to install and to adjust.
	Life span up to 50000 hours.
	Various power opitions for different requirments.
	Applied to shopping mall,hotel,exhibition hall,museum and etc.

Light distribution curve	<table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1.0</td> <td>4263</td> <td>30</td> </tr> <tr> <td>2.0</td> <td>1066</td> <td>60</td> </tr> <tr> <td>3.0</td> <td>474</td> <td>90</td> </tr> <tr> <td>4.0</td> <td>266</td> <td>118</td> </tr> </tbody> </table> <p>Beam Angle=15°</p>	m	Lux	cm	1.0	4263	30	2.0	1066	60	3.0	474	90	4.0	266	118	<table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1.0</td> <td>2725</td> <td>42</td> </tr> <tr> <td>2.0</td> <td>681</td> <td>83.5</td> </tr> <tr> <td>3.0</td> <td>303</td> <td>125.5</td> </tr> <tr> <td>4.0</td> <td>170</td> <td>167.5</td> </tr> </tbody> </table> <p>Beam Angle=24°</p>	m	Lux	cm	1.0	2725	42	2.0	681	83.5	3.0	303	125.5	4.0	170	167.5	<table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1.0</td> <td>2031</td> <td>60</td> </tr> <tr> <td>2.0</td> <td>508</td> <td>115</td> </tr> <tr> <td>3.0</td> <td>226</td> <td>170</td> </tr> <tr> <td>4.0</td> <td>127</td> <td>235</td> </tr> </tbody> </table> <p>Beam Angle=38°</p>	m	Lux	cm	1.0	2031	60	2.0	508	115	3.0	226	170	4.0	127	235	<table border="1"> <thead> <tr> <th>m</th> <th>Lux</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1.0</td> <td>977</td> <td>92</td> </tr> <tr> <td>2.0</td> <td>244</td> <td>184</td> </tr> <tr> <td>3.0</td> <td>108</td> <td>276</td> </tr> <tr> <td>4.0</td> <td>61</td> <td>375</td> </tr> </tbody> </table> <p>Beam Angle=55°</p>	m	Lux	cm	1.0	977	92	2.0	244	184	3.0	108	276	4.0	61	375
	m	Lux	cm																																																													
	1.0	4263	30																																																													
	2.0	1066	60																																																													
3.0	474	90																																																														
4.0	266	118																																																														
m	Lux	cm																																																														
1.0	2725	42																																																														
2.0	681	83.5																																																														
3.0	303	125.5																																																														
4.0	170	167.5																																																														
m	Lux	cm																																																														
1.0	2031	60																																																														
2.0	508	115																																																														
3.0	226	170																																																														
4.0	127	235																																																														
m	Lux	cm																																																														
1.0	977	92																																																														
2.0	244	184																																																														
3.0	108	276																																																														
4.0	61	375																																																														

Appearance color	black/white	Lamp Performance	
		power supply	Eaglerise Non-Dimmable Flicker free
IP/ insulation class	IP20	input voltage (V)	220-240V
		CCT (K)	2700K/3000K/4000K/5000K
Product	ISO9001 / CE / CB /	luminous flux/ (lm)	1000lm±10% (3000K 38°RA90)
		beam angle	15°/24°/38°/55°

Power (W)	12W (Bridgelux V8)	(Ra)	90	lifespans (H)	50000 Hours
Package size	inner box	carton size(L*W*H):			bubble bag