




GA-STANDARD

GA-STANDARD

Input Power	LED-Module	Color Consistency	Installation Type	Material	Lumen Maintenance	Beam Angles	Luminaire Color
220 – 240V	Philips 1208 930 PW HE Philips 1208 940 PW HE	2-Step MacAdam	Nordic Aluminium Global Trac 3-Circuit Tracks	Powder Painted Die-Cast Aluminum	50 000h L80 B10	S 15° NFL 20° NFL 3d 24° FL 30° MFL 3d 36° WFL 50°	White (RAL 9016) Black (RAL 9005)

Forward Current	COB Type	System Luminous Flux	System Power	Lm/W
350mA	1208 930 PW HE	1.803Lm	13,4	134,5
350mA	1208 940 PW HE	1.895Lm	13,4	141,4
500mA	1208 930 PW HE	2.532Lm	19,1	132,6
500mA	1208 940 PW HE	2.669Lm	19,1	139,8
650mA	1208 930 PW HE	3.228Lm	24,4	132,3
650mA	1208 940 PW HE	3.411Lm	24,4	139,8
850mA	1208 930 PW HE	4.110Lm	33,7	121,9
850mA	1208 940 PW HE	4.357Lm	33,7	129,3

Technical Dimensions:

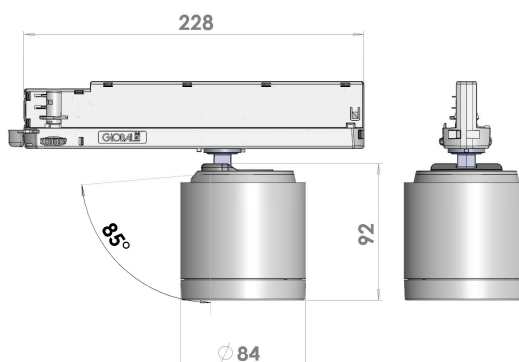

IP20

LED Design | Made In Finland

LIVAL